Jameco Part number 143095

1355 Shoreway Rd., Belmont, CA 94002
Tel: (415) 562-8097 Fax: (415) 592-2503
BBS: (415) 637-9025 Internet: http://www.jameco.com info@jameco.com

LED Connectors

T1 LED Connectors
Part No. 143079, 143087, 143095, 143052, 143108, 143116

- For use with part no. 143212, 143204, 143191, 143183 (Low Profile Lens)
- For use with part no. 143175, 143221 (Retaining LED Rings)

MATERIAL: Panel connector, Socket & Ring - Thermoplastic (black).
Header Connector - Thermoplastic (black) UL 94-V0.
Terminals – Phosphor bronze, tin plated.
Wire - 22 AWG, 7 stand copper, insulated.

ELECTRICAL: Terminal - 3 amp, continuous service. Unique three-finger design mates to round, square or rectangular leads. .017" to. 025".

MOUNTING: Panel Connector 3mm - Mate with CLIPLITE model SMC 170.
Panel Connector 5mm – Mate with CLIPLITE model CMC 321.

Panel Thickness:
SMC 170 3mm lens - .125" max.
CMC 321 5mm lens - .125" max.

Hole Size:
SMC 170 3mm lens - .171" (11/64")
CMC 321 5mm lens - .281" (9/32")



450 120 Panel Connector for 3mm Bi-Lead LED, Use SMC 170 Series Lens.



450 220 Panel Connector for 5mm Bi-Lead LED, Use CMC 321 Series Lens.

- ***INSTALLATION:*** Modular cabling systems simplify the electrical connection from panel to PCB and eliminate the need for assembly tools. Cost savings from the discontinuing of soldering and terminal crimping operations are substantial.

PANEL MOUNT LENS & CONNECTOR

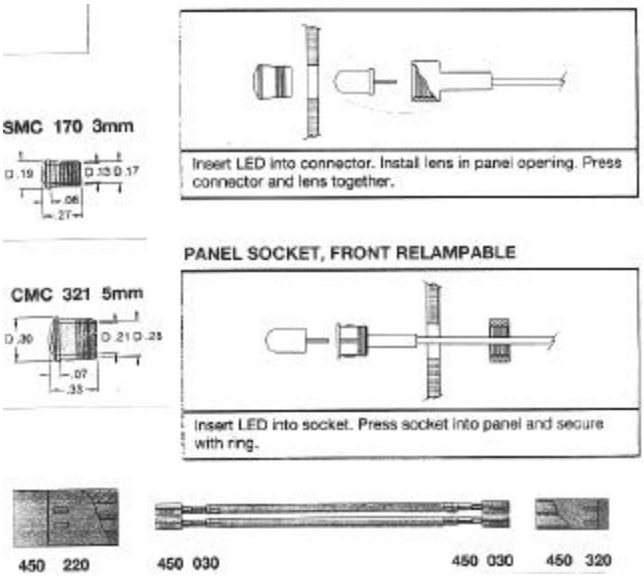
SMC 170 3mm
Insert LED into connector. Install lens in panel opening. Press connector and lens together.
CMC 321 5mm
PANEL SOCKET, FRONT RELAMPABLE
Insert LED into socket. Press socket into panel and secure with ring.
450 220
450 030
450 030
450 320